



iMS2-P revE

Dual Output High Speed RF Synthesizer with Controller 'Pro'



0125

Description

The *iMS2-P* rev-E is a programmable frequency source designed around a dual output direct digital synthesizer (DDS). This revision is optimized for high-speed single axis AO deflector applications. The *iMS4* is designed around a modular concept. When mated to one of many compatible power amplifiers, the *iMS2-P* will suit the drive requirements of the majority of Isomet AO devices.

The *iMS2-P* functions are controlled via USB-III or Gb Ethernet (RS422 option available). MS Windows10/11 GUI, Python support and a comprehensive C++ SDK are all provided. The SDK defines all the function calls that are possible on an *iMS* system and allows the system integrator to quickly and efficiently develop application software at a high level of abstraction. All low level protocol communication is handled by the library functions. (DLL call functions).

DIRECT Mode

The *iMS2* outputs are controlled directly from the host PC.
All output parameters can be set independently. The tuning rate is limited by the host PC interface.

Available Functions:

- Single tone (static frequency) output.
- Zero to Max Amplitude control.
- 0-360° phase shift between outputs
- Differential frequency offset between the outputs.

EXTENDED TONE (Sweep) Mode

Frequency sweep parameters are configured at the host PC and downloaded directly to the DDS chip. A single trigger (via PC or external input) initiates the sweep. The increment step value and step duration are user programmable.

Available Functions:

- Up or Down
- Dwell or No dwell at completion.

The sweep mode offers the fastest frequency scan capability, with a minimum dwell time of 8nsec per frequency increment. Amplitude and phase values remain constant in this mode.

IMAGE Mode

The *iMS2-P* outputs are controlled from frequency "Image" data programmed into dedicated memory.

There are two 128Mx16 memory banks each capable of storing over 10 million frequency/amplitude/phase points in multiple image files. Phase values are automatically inserted from a user defined compensation table (LUT) pre-loaded during initialization. The stored image points each comprise of 16-bit Frequency, 10-bit Amplitude, 14-bit Phase and 12-bit synchronous GPIO. Output data is addressed in sequence under the control of external or internally generated trigger and clock signals. The RF signal responds to a new data set at each valid update clock. The minimum dwell time per frequency point is less than 0.3usec (3.5MHz update rate). The user can specify trigger, clock, repeat, input and output delay functions. The 12-bit GPIO outputs are user programmable and output synchronously with the frequency points.

The image mode is highly flexible and allows fast continuous data throughput. Multiple images and play sequences can be created and downloaded on-the-fly. Each frequency point can be modified by the LUT compensation function. This function automatically applies AO device specific phase and amplitude calibration data to the image file(s) within the *iMS2*. Active phase control across the multiple RF outputs is ideally suited for driving Isomet (acoustic) beam steered AO deflectors.

TONE BUFFER Mode

Similar to Image mode except the data is limited to 256 separately programmable frequency, amplitude and phase points. These points may be addressed randomly from software control or an 8-bit external port. Data addressing is not clocked. Outputs change value immediately after a new buffer address is applied. Maximum update rate in this mode is 90KHz.

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: RF & Digital design
Software Development
OEM manufacture



iMS2-P revE

Dual Output High Speed RF Synthesizer with Controller 'Pro'



0125

Specification

Maximum Frequency Bandwidth (full range):	10 - 210 MHz
Outputs:	Dual independent outputs, phase continuous
Frequency resolution (full range):	32bit fundamental, 16bit default Image mode resolution
Frequency settling (Image mode):	< 40nsec.
Max. output rate (Image mode):	5 MHz (200nsec minimum dwell per image point)
Frequency stability (internal reference clock):	+/- 2.5ppm
Phase control (Dual output version):	+/- 180deg differential between outputs
Output Power per output:	1dBm. (1.3mW) at 80MHz
Output power flatness:	< +/- 1dB per octave, with no amplitude programming.
Harmonics:	> 25dBc
RF On:Off contrast ratio	> 40dBc (using external analog modulation inputs) > 60dBc (using data control)
Peak power adjustment range:	>35dB via digital potentiometers.
Amplitude resolution (Image/Tone data):	10bit full range, zero to set peak power level.
External asynchronous modulation input(s):	0-10V or 0-1V (option), full range, zero to defined power level. <i>Configurable: common or channel scoped, override or disable control.</i>
DC Supply:	+24V nominal @ <0.5A, (voltage range +15V to +30V)
Communications:	USB II/III, Gb Ethernet, RS422 (option)
External Clock, Trigger & Gate Inputs:	5V logic, buffered with hysteresis, SMA connectors (std) 50MB optical receiver AFBR2624 (option) 50ohm termination (option)
Memory capacity:	Configuration dependent, 4-40million frequency data points.
Calibration 'Look-Up-table' function:	Channel specific frequency dependent compensation data.
Auxiliary I/O	- Synchronous: 12bits SDIO, 2x DAC outputs - Asynchronous: 4bits GPO, 8bits GPI, 1x DAC output, 2x ADC inputs, Quadrature encoder inputs for 'on-the-fly' tracking applications.
Synchronous and GP digital IO:	5V logic, galvanic isolated. (non-isolated as option).

Optional Features

RS422 serial
Optical receivers
0-1V external modulation

Model:

iMS2-P-R
iMS2-P-O
iMS2-P-1V

Associated models:

Quad Output version, 10-210MHz
Compact Synthesizer, 32Mx8 memory, single image:
Higher Frequency, dual output, 25-400MHz:
Power Amplifier Modules:

see separate data sheet: iMS4-P
see separate data sheet: iCSL-1, -2
see separate data sheet: iMS2-HF
see separate data sheets: AJ0, AG0, AF0, AM1 series & others.

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: RF & Digital design
Software Development
OEM manufacture




iMS2-P revE

Dual Output High Speed RF Synthesizer with Controller 'Pro'



0125

Outline Drawing

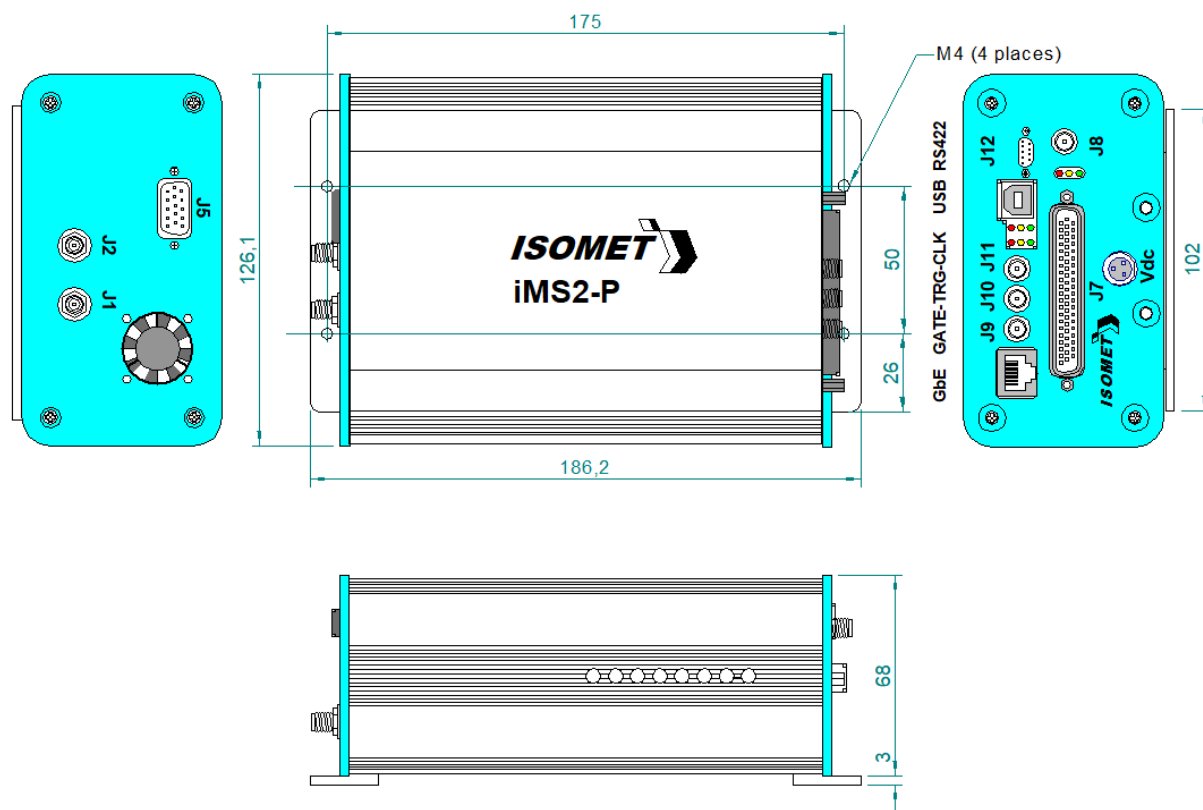

Connector Summary

All digital I/O signals are ESD protected to IEC6100-4-2 and include EMI suppression.

Ident	Type	Description
J1, J2	SMA	RF outputs
J5	15-way High density female D-type	External amplifier control and diagnostics *
J7	62-way High density female D-type	Control, GPIO, differential encoder inputs
J8	SMA	Reference Clock Input (option)
J9	SMA or POF (option)	Gate input
J10	SMA or POF (option)	Trigger input
J11	SMA or POF (option)	Clock input / output
J12	9-way female micro-D	RS422
USB	Type B	USB II/III
GbE	RJ45	Ethernet
Vdc	3-way TINI-Q male socket	15-24Vdc voltage input

* Compatible with Isomet RFA amplifiers such as RFA0110-, RFA0120-, RFA0140-, RFA0170-, AM1 series

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 10342 Battleview Parkway, Manassas, VA 20109, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: RF & Digital design
Software Development
OEM manufacture