

RFA3050-2-x


RF Driver/Amplifier



0115

OUTLINE DRAWING

Dim's = mm

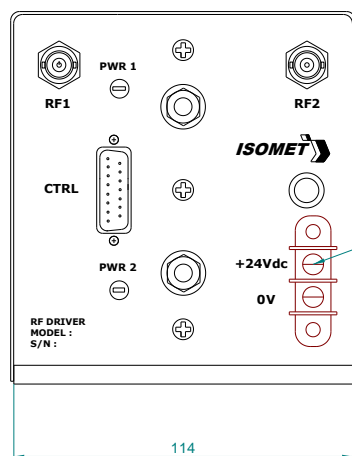


DC Input
6/32 UNC
screw
terminal

RF Outputs
BNC (2 off)

G 1/8" Thread Water Fittings (2 off)
Water cooled Heatsink
Must not exceed 70deg C

15way D-type Plug

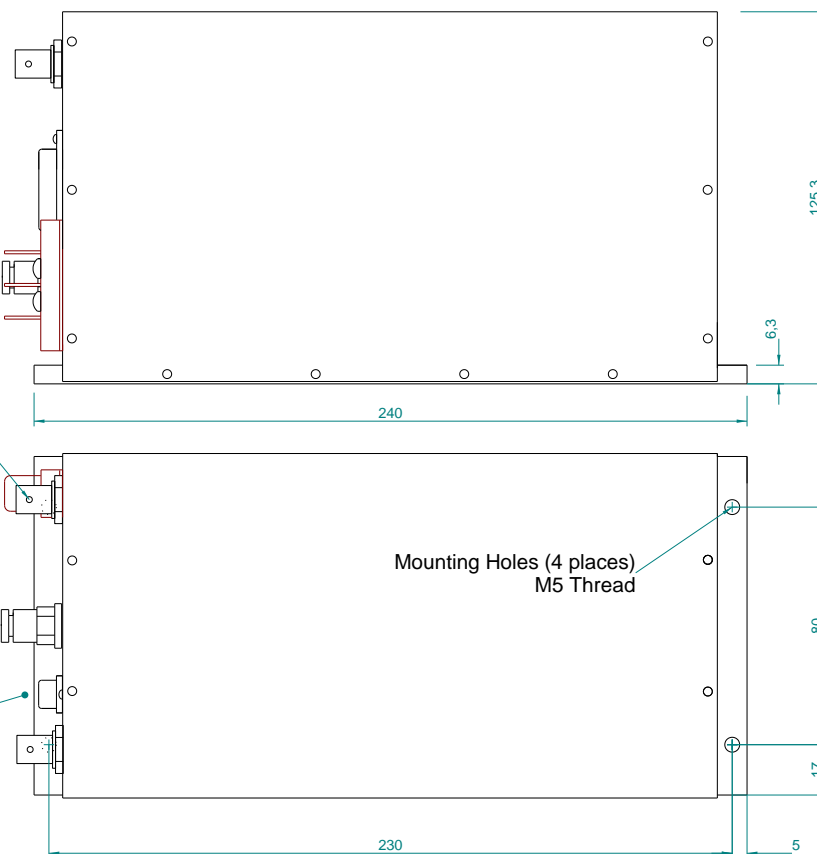

Mounting Holes (4 places)
M5 Thread

Options -x, multiple combinations possible:

- A : 0-10V analog modulation range
- BR : Brass water cooled heatsink (water fittings on RF output face)

Refer application note AN0901 regarding Coolant Specification

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: RF & Digital design

Software Development

OEM manufacture