

M1136B-FS120L-1, -2, -3

UV Acousto-Optic Modulator



0325


The M1136B-FS120L is optimised for operation with UV lasers in the 230-355nm wavelength range. This model is available with 1.0, 2.0mm or 3.0mm active aperture heights, exhibits high efficiency and is convection cooled.

SPECIFICATIONS

Interaction Medium:	Fused Silica
Acoustic Velocity:	5.960mm/ μ s
Operating Wavelength:	230-355nm (as specified by A/R)
Center Frequency, f_c :	120 MHz
RF Bandwidth, Δf :	>10 MHz
Diffraction Efficiency:	>85%
Input Impedance:	50 Ω (Nominal)
Input VSWR:	<1.5:1 @ 120MHz
Clear Aperture:	6mm
Active Aperture H:	Specify H=1 for 1.0mm, H=2 for 2.0mm, H=3 for 3.0mm
Optical Insertion Loss:	<5%
Reflectivity:	<0.5%/Surface
DC Contrast Ratio:	>1000:1 (>2000:1 Typical)
Laser Polarization:	Vertical, Perpendicular to Base
Peak Optical Power Density:	250MW/cm ²
Cooling:	Conduction Case temperature must not exceed 50degC

PERFORMANCE vs. WAVELENGTH

Wavelength (nm):	244	267	280	323	355
RF Drive Power (Watts) **::	2.5	3	3.2	4.3	5.2
Bragg Angle (mrad):	2.46	2.69	2.82	3.25	3.57
Separation Angle at f_c (mrad):	4.91	4.93	5.64	6.50	7.15

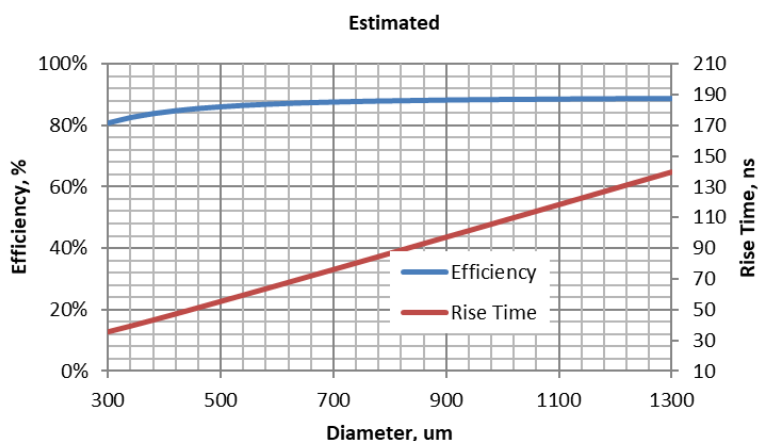

** RF power listed for 3mm active aperture. For the 2mm version, scale by 2/3 For the 1mm version, scale by 1/3

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding



M1136B-FS120L-1, -2, -3

UV Acousto-Optic Modulator




0325

Suggested Drive Electronics

	Digital (On:Off)	Analog (Proportional)	Dual
Fixed frequency	522F-4-120 522F-6-120	532F-2-120 532F-6-120	552F-4-120 552F-6-120
VCO, tuneable	RF2-120T-4	RF3-120T-4	RF5-110T-4
Programmable Synthesizer		iCSA-120T-1-6	

OUTLINE DRAWING

Dim'n : mm

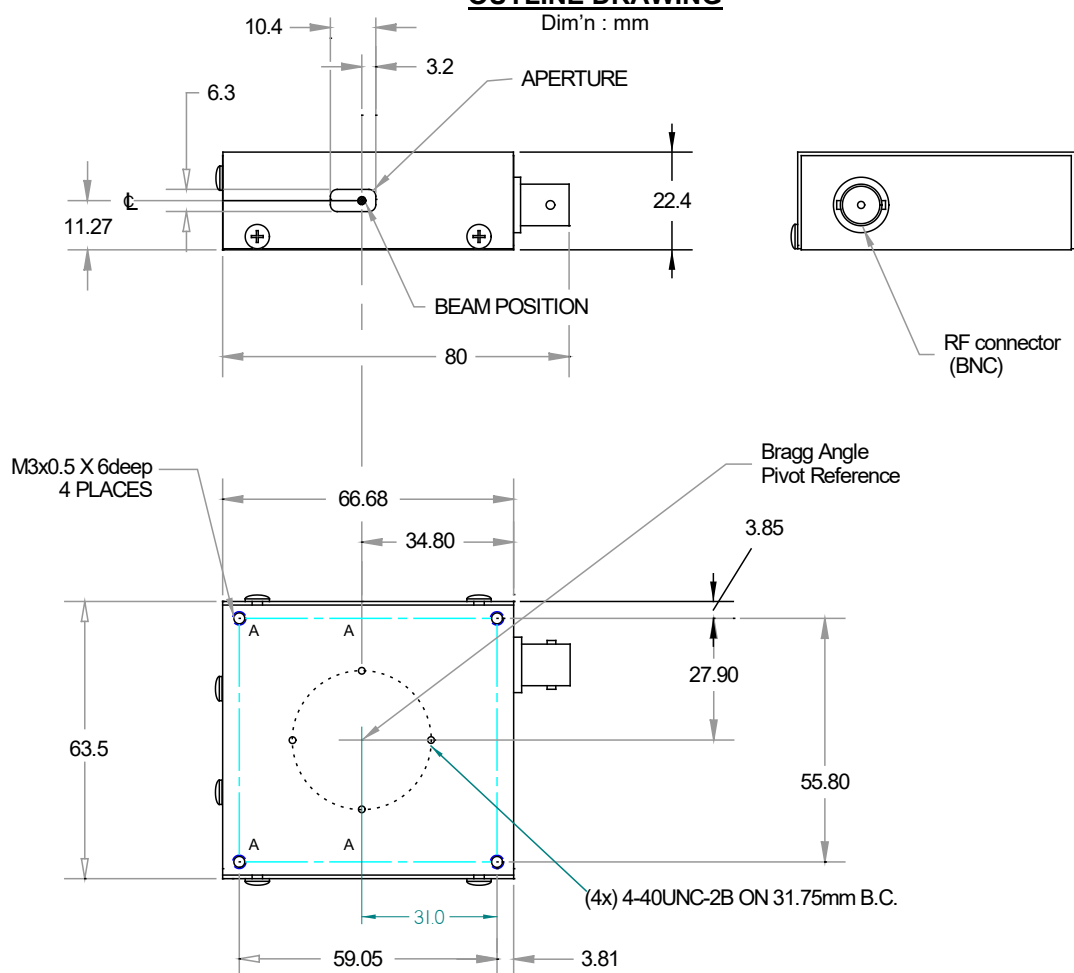

Both metric and UNC mounting holes
MOUNT TO HEAT CONDUCTIONG SURFACE

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.
Tel: (703) 321 8301 Fax: (703) 321 8546
E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.
In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding