

M1340-aQ120-3,-5,-7



UV Acousto-Optic Modulator/Deflector

0622

The M1340-aQ120 is high efficiency AO modulator developed specifically for industrial 343/355nm laser applications.

- Material Processing
- Drilling
- Surface texturing
- Micro machining

SPECIFICATIONS

Operating Wavelength:	343 or 355nm (specify)
Interaction Material:	Quartz
Centre Frequency (fc):	120MHz
RF Bandwidth:	20MHz
Diffraction Efficiency at fc:	85% minimum, >90% typ
Input Impedance:	50Ω(Nominal)
Input VSWR:	<1.5:1 @ 120MHz
Active Aperture, H:	-3, 3mm
	-5, 5mm
	-7, 7mm
Optical Insertion Loss:	<3% (<2% typical)
Reflectivity:	<0.5%/Surface
DC Contrast Ratio:	>1000:1 min (2000:1 typical)
Laser Polarization:	Vertical, Perpendicular to scan
Water Cooling (Min):	2L/minute @ 25deg C

PERFORMANCE vs. WAVELENGTH

Wavelength:	343nm	355nm
RF Drive Power, H=3mm:	<5.5W	<6W
H=5mm	<9.5W	<10W
H=7mm	<13W	<14W
Bragg Angle:	3.6mrad	3.74mrad
Separation Angle (at fc):	7.2mrad	7.47mrad

PERFORMANCE vs. BEAM DIAMETER


Beam Diameter (mm):	5.0	3.0
Optical Rise time (nsec):	570	337
Video Bandwidth (MHz):	0.7	1.5

RF Drive Electronics

RFA2120-1-15 (water cooled)

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.
 Tel: (703) 321 8301 Fax: (703) 321 8546
 E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.
 In-house: Crystal Growth,
 Optical Polishing,
 A/R coating, Vacuum Bonding




M1340-aQ120-3,-5,-7



UV Acousto-Optic Modulator/Deflector

0622

OUTLINE DRAWING

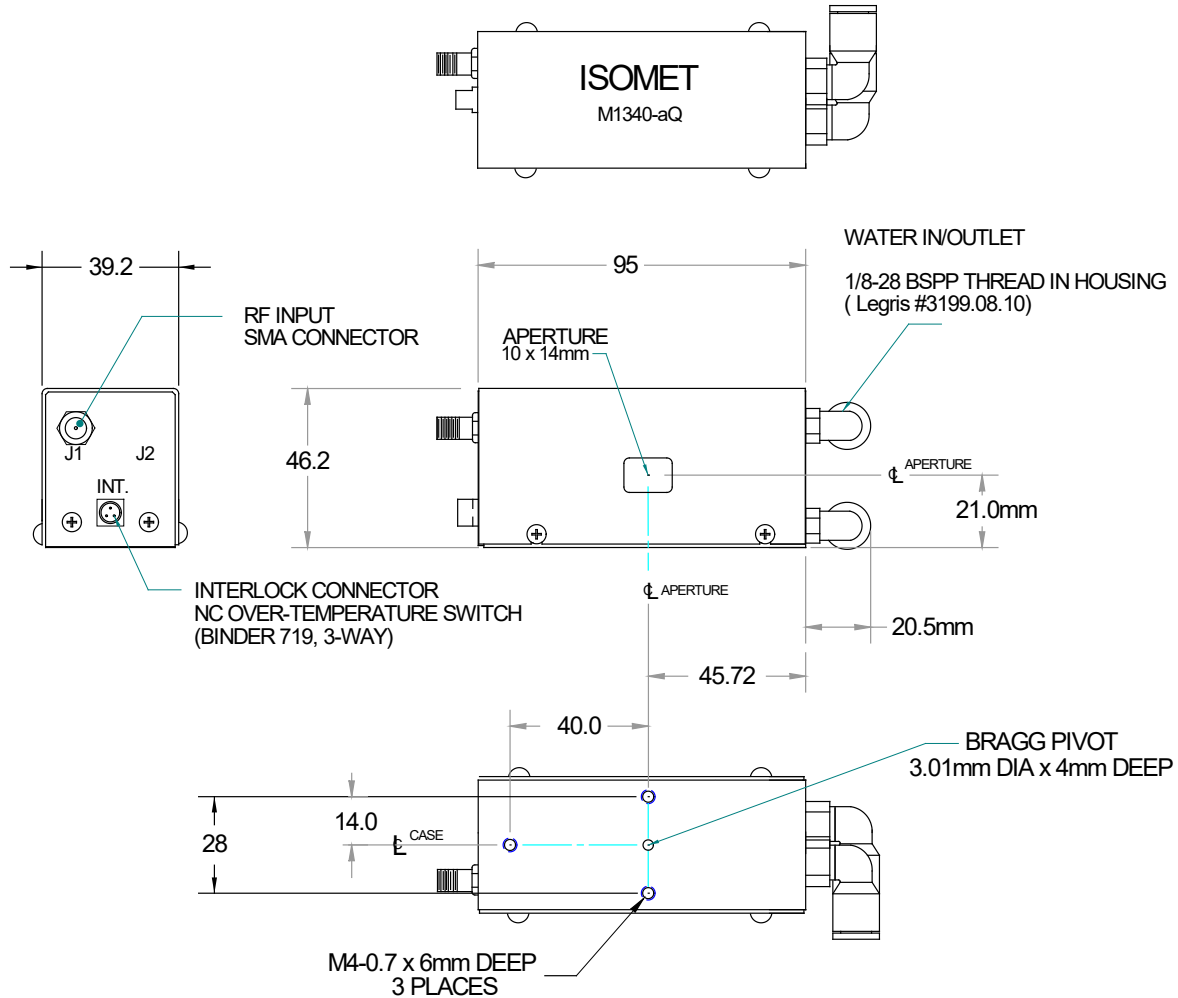

Water cooled case parts are made from Aluminium.
Copper alternative is available as an option

Refer application note AN1906 regarding Coolant Specification

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.
Tel: (703) 321 8301 Fax: (703) 321 8546
E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.
In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding