

# OP50-T45S-4

## Acousto-Optic Bragg Cell



0421

A long time aperture Acousto-optic Bragg Cell for Optical Signal Processing Applications


### OPERATING PARAMETERS

*Operating Wavelength:	633nm
$\tau\Delta f$ :	1500
Centre Frequency:	45MHz
3dB Bandwidth:	30MHz
Active Aperture:	4mmH x 31mmL
Time Aperture:	50 $\mu$ s
Interaction Medium:	TeO <sub>2</sub> - Shear (110)
Acoustic Velocity:	0.617mm/ $\mu$ s
Diffraction Efficiency:	> 50% at 0.5 Watts RF Power
Input Impedance:	50 $\Omega$
Input VSWR:	$\leq$ 2:1 across RF Bandwidth
Electrode Profile:	Apodized to minimise acoustic walkoff
Optical Surface Flatness:	$\lambda/10$ or better
Optical Reflectivity:	$\leq$ .5%/Surface
RF Power (Maximum):	1.2 Watts

\*Models are available for use at any wavelength within the range 442nm-850nm, but certain operating parameters differ, depending on the wavelength selected.

**ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**  
 ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.  
 Tel: (703) 321 8301 Fax: (703) 321 8546  
 E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM) Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

**Quality Assured.**  
 In-house: Crystal Growth,  
 Optical Polishing,  
 A/R coating, Vacuum Bonding



# OP50-T45S-4


## Acousto-Optic Bragg Cell



0421

### OUTLINE DRAWING

Dim'n: mm

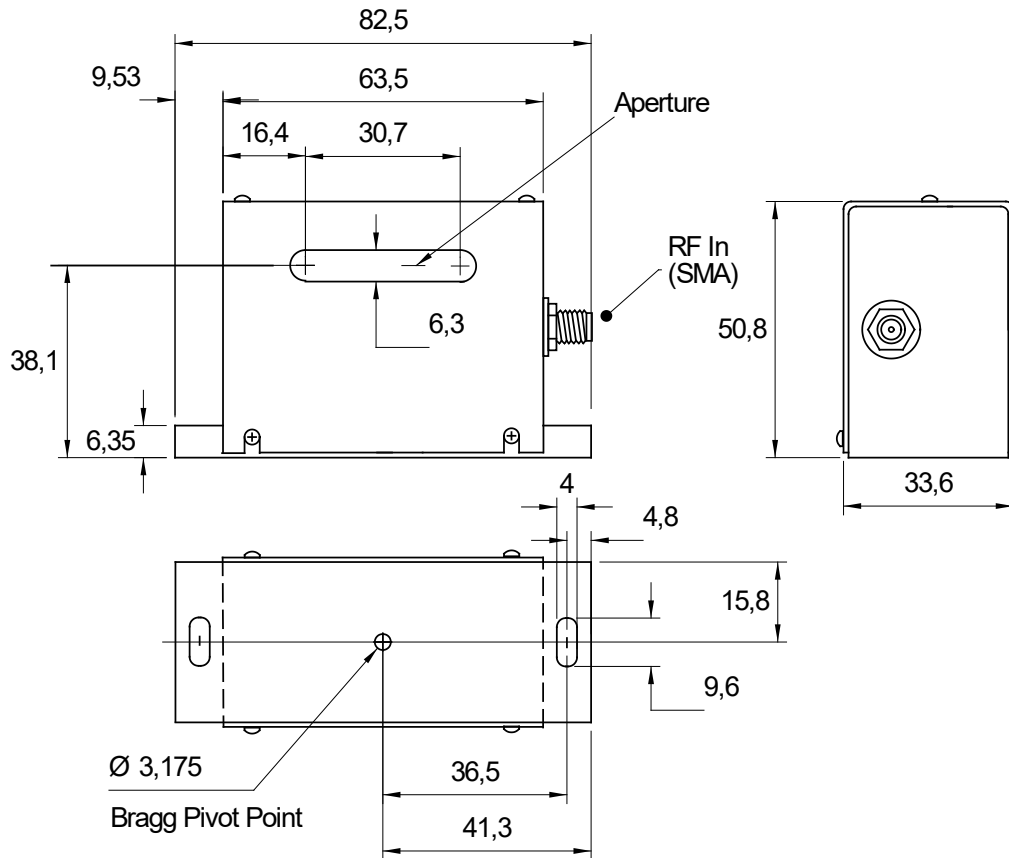

### RECOMMENDED DRIVERS

- 551F-2-45 (fixed frequency with modulation)
- 620C/630C-40 (VCO driver with modulation)
- iMSL4-L plus AG0-45T-1 (Synthesizer/amplifier with modulation)

**ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**  
 ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.  
 Tel: (703) 321 8301 Fax: (703) 321 8546  
 E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM) Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

**Quality Assured.**  
 In-house: Crystal Growth,  
 Optical Polishing,  
 A/R coating, Vacuum Bonding